

AW-600P

Pan/ Tilt/ 10X Optical Zoom Network Camera


FEATURES

- MPEG and MPEG4 Video Compression Selectable
- Pan: Range 270 degree, Tilt: Range 135 degree
- Built-In Web Server
- Motorized Pan / Tilt / 10X Optical Zoom Lens and Digital Zoom Control
- Fast Ethernet 10/100 Mbps Connectivity
- Built-in omni-directional microphone
- Internal Microphone Built-in
- Support Static IP or Dynamic IP (DDNS)
- Support 2-Way Audio
- CCD Sensor for superior quality image
- Easy setup and Installation (UpnP supported)
- Remarkable motion detection & e-mail alerts
- 16-channel monitoring software



Package Contents:

- Wired internet Camera
- Power Adapter
- Camera Stand
- Software CD-ROM
- Quick Installation Guide
- A/V cable
- Remote Controller

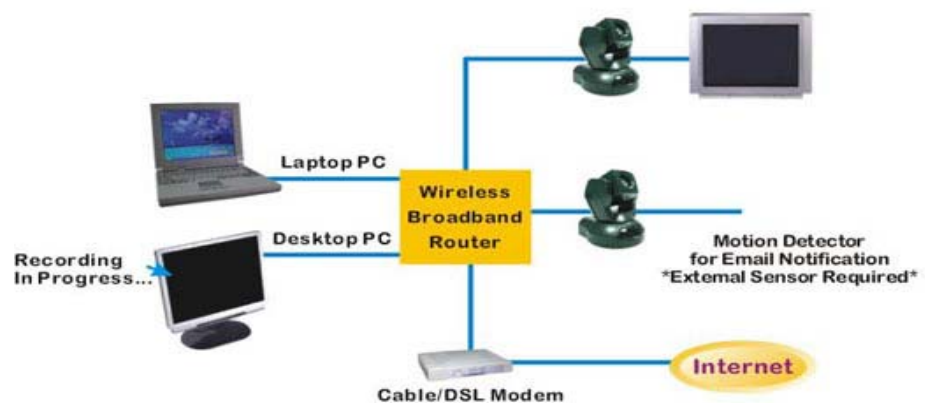

SPECIFICATION

Networking Protocols	TCP/IP, HTTP, SMTP, FTP, Telnet, NTP, DNS , DHCP
System	CPU: Trimedia PN1300 RAM:16MB SDRAM ROM:4MB Flash ROM
Image Pick-up Device	1/4 inch color CCD Sensor
physical	10BaseT Ethernet or 100 BaseT Fast Ethernet
Microphone	Omni-directional Frequency: 20-20,000Hz S/N ratio: more than 58dB
Video Algorithm Supported	MPEG4 SP and JPEG
3 motion detection window	Up to 30/25 frames at 176x120 or 176x144 Up to 30/25 frames at 352x240 or 352x288 Up to 30/25 frames at 704x480 or 704x576
Audio	32kbps,24kbps,8kbps Acoustic echo cancellation Full duplex audio communication
Lens	Focal length 4.2~42mm Aperture F1.8~2.9 10X digital zoom 10X optical zoom
Camera spec.	1/4 inch color CCD sensor 704x480 or 704x576 Typical: 1.5 Lux / F1.8 AGC,AWB Electronic shutter:1/60(1/50) to 1/120,000 secretary
LED Indicator	Dual color system status indicator
Viewing System requirement	Operating system: MICROSOFT Windows 98SE/ME/2000/XP Browser : Internet Explorer 6.x or above
Power	Consumption :MAX 12W Universal switching power supply included Adapter input: 100-240VAC, 50/60Hz, 0.4A Adapter output: 12VDC, 1.5A
Operating Environment	Temperature :0-40°C/32-104°F Humidity:85%RH
Dimension	104.5mm * 104.5mm * 125mm
Weight	Net. 420g